

To: Marvin Hora, Doug Hall and Mark Tomasek, Minnesota Pollution Control Agency
From: Greg Wilson and Tim Anderson
Subject: Final — Detailed Assessment of Phosphorus Sources to Minnesota Watersheds — Individual Sewage Treatment Systems/Unsewered Communities
Date: January 16, 2004
Project: 23/62-853 ISTS 009
c: Henry Runke

The purpose of this memorandum is to provide a discussion about unsewered communities and Individual Sewage Treatment Systems (ISTS) as sources of phosphorus to Minnesota watersheds. This discussion is based on a review of the available literature, monitoring data and the results of phosphorus loading computations done for each of Minnesota's major watershed basins as part of this study. This memorandum is intended to:

- Provide an overview and introduction to these sources of phosphorus
- Describe the results of the literature search and review of available monitoring data
- Discuss the characteristics of each watershed basin as it pertains to these sources of phosphorus
- Describe the methodology used to complete the phosphorus loading computations and assessments for this study
- Discuss the results of the phosphorus loading computations and assessments
- Discuss the uncertainty of the phosphorus loading computations and assessment
- Provide recommendations for future refinements to phosphorus loading estimates and methods for reducing error terms
- Provide recommendations for lowering phosphorus export from unsewered communities and individual sewage treatment systems

Overview and Introduction to Unsewered Communities and ISTS Sources of Phosphorus

“Unsewered” or “undersewered” areas are communities or residential areas which have inadequate or no centralized wastewater treatment (sewer) systems. In many cases they may have a sanitary sewer system. Individual sewage treatment system (ISTS) refers to a sewage treatment and disposal system located on a property, using subsurface soil treatment and disposal for an individual home or establishment. MPCA

To: Marvin Hora, Doug Hall and Mark Tomasek, Minnesota Pollution Control Agency
From: Greg Wilson and Tim Anderson
Subject: Final — Detailed Assessment of Phosphorus Sources to Minnesota Watersheds — Individual Sewage Treatment Systems/Unsewered Communities
Date: January 16, 2004
Page: 2

(2002a) states that most unsewered communities and many failing septic systems have relatively direct connections to surface waters through tiles lines, resulting in a very high delivery potential. Failing systems are systems that are adversely impacting groundwater, while those systems which discharge partially treated sewage to the ground surface, road ditches, tile lines, and directly into streams, rivers and lakes are considered an imminent threat to public health and safety (ITPHS).


Unsewered areas include but are not limited to incorporated cities (some), unincorporated communities, clusters of homes, trailer parks or other rural residential areas where wastewater collection is not done through a large sewer system. Undersewered areas may include unincorporated communities, incorporated cities (some), clusters of homes, trailer parks, or rural residential areas where existing wastewater treatment methods are not adequate to protect public health or the environment. The situations range from failing individual systems to cities with inadequate collection and treatment infrastructure.

Minnesota Rules Chapter 7080 contains minimum standards and criteria for the location, design, installation, use, maintenance and abandonment of ISTS, a licensing program for ISTS professionals and administrative requirements for local units of government. The conventional ISTS consists primarily of a septic tank and a soil absorption field. Septic tanks remove most settleable and floatable material and function as an anaerobic bioreactor that promotes partial digestion of retained organic matter (EPA, 2002). Septic tank effluent, which contains significant concentrations of pathogens and nutrients, has traditionally been discharged to soil, sand, or other media absorption fields for further treatment through biological processes, adsorption, filtration, and infiltration into underlying soils. Conventional systems work well if they are installed in areas with appropriate soils and hydraulic capacities; designed to treat the incoming waste load to meet public health, ground water, and surface water performance standards; installed properly; and maintained to ensure long-term performance (EPA, 2002).

Phosphorus is present in significant concentrations in most wastewaters treated by ISTS. After treatment and percolation of the wastewater through the infiltrative surface biomat and passage through the first few inches of soil, the wastewater plume begins to migrate downward until nearly saturated conditions exist (EPA, 2002). Reduced treatment occurs when the plume is mixing with an elevated water table (see Figure 1). At that point, the wastewater plume will move in response to the prevailing hydraulic gradient. The movement of subsurface aqueous contaminant plumes is highly dependent on soil type, soil layering, underlying geology, topography, and rainfall (EPA, 2002). In regions with moderate to heavy rainfall,

descending effluent plumes remain relatively intact as the water table is recharged from above.

Monitoring below ISTS systems has shown that the amount of phosphorus leached to ground water depends on several factors: the characteristics of the soil, the thickness of the unsaturated zone through which the wastewater percolates, the applied loading rate, and the age of the system (EPA, 2002). The amount of phosphorus in ground water varies from background concentrations to concentrations comparable to that of septic tank effluent. The capacity of the soil to retain phosphorus is finite. With continued loading, phosphorus movement deeper into the soil profile and downgradient water resources can be expected.

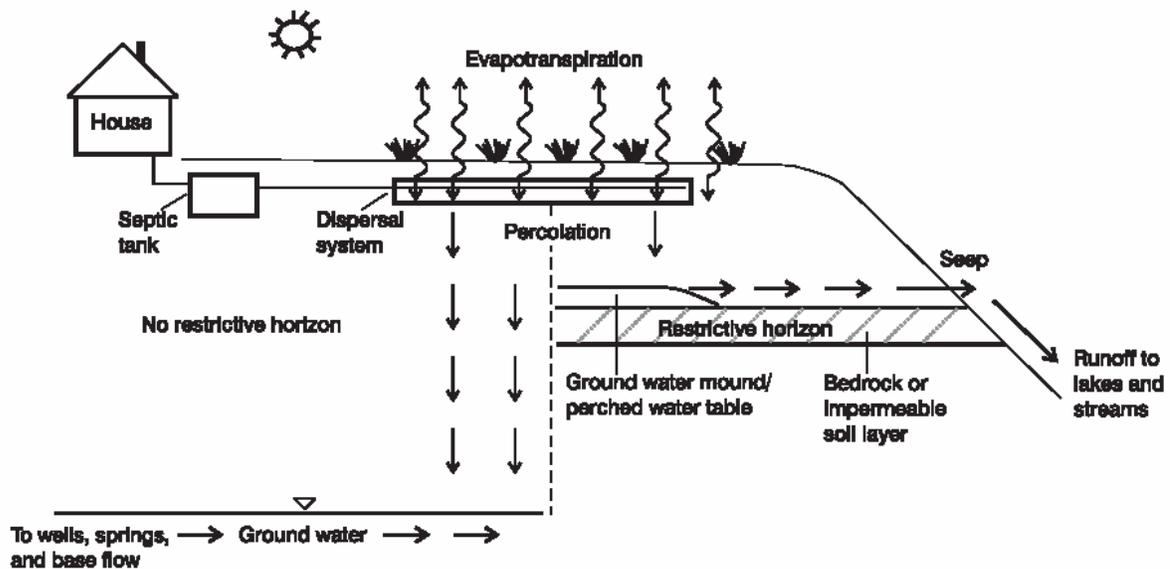

Source: Adapted from Verhuizen, 1995.

Figure 1: Schematic of ISTS wastewater discharge.

As previously discussed, conventional treatment systems work well if they are installed in areas with appropriate soils and hydraulic capacities; designed to treat the incoming waste load to meet public health, ground water, and surface water performance standards; installed properly; and maintained to ensure long-term performance (EPA, 2002). As a result, phosphorus export to surface waters from ISTS and unsewered communities is dependent on the following factors:

- Phosphorus content of waste load
- Population served by ISTS or unsewered communities
- Compliance of treatment systems with performance standards
- Characteristics of soil absorption field, groundwater conditions and proximity to surface waters

Review of Available Data and Estimation of Population Served by ISTS/ Unsewered Communities

Data pertaining to the phosphorus content of the untreated waste load from unsewered communities was addressed in the Point Sources Technical Memorandum (Barr, 2003), prepared for this project. For the purposes of this analysis, the phosphorus contained in untreated sewage discharge from ISTS or unsewered communities consists of the following sources, with the corresponding per capita loadings of phosphorus (taken from the Point Sources Technical Memorandum):

| <u>Source</u> | <u>Phosphorus Load (kg/cap/yr)</u> |
|--|------------------------------------|
| Automatic dishwasher detergent | 0.1250 |
| Dentifrices | 0.0115 |
| Food soils and garbage disposal wastes | 0.1895 |
| <u>Ingested Human wastes</u> | <u>0.5585</u> |
| Total | 0.8845 |

Dentifrices include toothpaste and other dental care products. Food soils include waste food and beverages poured down the sink, and food washed down the drain as a result of dish rinsing and washing (Barr, 2003). The total per capita phosphorus load of 0.8845 kg/yr, which corresponds to 1.946 lbs/cap/yr, was assumed to apply to the population served by ISTS or unsewered communities throughout the state.

The number of people served by ISTS was estimated from a variety of data sources. Table 1 provides a summary of population served by ISTS by basin using four data sources. A description of each of these data is discussed below. Two of the data sources were spreadsheets provided by the Minnesota Pollution Control Agency, another was the 1990 Census (United States Census Bureau, 1990), and the last was estimated based on the results from the Point Sources Technical Memorandum. Table 1 contains a summary of the population served by ISTS by major drainage basin for each of the four methods examined.

The method using the difference between the 2000 Census (United States Census Bureau, 2000) population and the POTW population served totals were used in the study to estimate phosphorus loadings from ISTS. This data showed good consistency with the other data available for ISTS in

Table 1
Estimates of Population Served

| Major Basin | 1990 Census Population | 2000 Census Population | POTW Data | | | | 1990 Census Data | | LUG Spreadsheet | | Unsewered Areas | |
|-------------------|------------------------|------------------------|-----------------------------|--|-------------------------|------------------------------------|--------------------------------|------------------------------------|---------------------------|---------------------------------|---------------------------|-------------------------------|
| | | | 2000 POTW Population Served | Loss or gain of Population due to Basin Transfer | 2000 ISTS by Difference | ISTS Percentage of 2000 Population | 1990 Population Served by ISTS | ISTS Percentage of 1990 Population | Population Served by ISTS | ISTS Percent of 2000 Population | 2002 Unsewered Population | Percentage of 2000 Population |
| Cedar River | 66,144 | 66,934 | 49,280 | 0 | 17,654 | 26% | 16,687 | 25% | 11,207 | 17% | 299 | 0% |
| Des Moines River | 34,517 | 34,955 | 28,137 | 0 | 6,818 | 20% | 12,231 | 35% | 13,198 | 38% | 1,028 | 3% |
| Lake Superior | 212,223 | 221,000 | 181,581 | 0 | 39,419 | 18% | 62,885 | 30% | 20,306 | 9% | 342 | 0% |
| Lower Mississippi | 471,122 | 558,351 | 378,098 | -36787 | 143,466 | 26% | 136,049 | 29% | 81,967 | 15% | 11,272 | 2% |
| Minnesota River | 763,066 | 861,292 | 743,145 | 40110 | 158,257 | 18% | 169,309 | 22% | 162,244 | 19% | 25,872 | 3% |
| Missouri | 35,377 | 33,777 | 17,080 | 0 | 16,697 | 49% | 13,992 | 40% | 12,858 | 38% | 509 | 2% |
| Rainy River | 48,476 | 46,946 | 13,413 | 0 | 33,533 | 71% | 26,855 | 55% | 40,380 | 86% | 6,216 | 13% |
| Red River | 237,920 | 244,216 | 131,742 | 0 | 112,474 | 46% | 105,823 | 44% | 100,025 | 41% | 8,966 | 4% |
| St. Croix River | 157,613 | 206,190 | 52,242 | -43,428 | 110,520 | 54% | 85,184 | 54% | 110,427 | 54% | 32,612 | 16% |
| Upper Mississippi | 2,350,483 | 2,645,132 | 2,231,380 | 40105 | 453,857 | 17% | 458,195 | 19% | 520,096 | 20% | 154,696 | 6% |
| TOTAL | 4,376,940 | 4,918,793 | 3,826,098 | 0 | 1,092,695 | 22% | 1,087,208 | 25% | 1,072,708 | 22% | 241,812 | 5% |

LUG: Local Unit of Government

Minnesota. By using the by difference method, a total accounting of domestic waste disposal is provided in this study.

Below is a description of the data used to develop the summary in Table 1.

MPCA Unsewered Communities Spreadsheet

The MPCA developed a spreadsheet, updated in September, 2003, providing a list of unsewered communities within Minnesota (MPCA, 2003a). Included in the spreadsheet are 841 communities. The major basin for each of these communities was estimated by assigning an approximate geographic location based on a city, township, lake/county, or township-range-section location (whichever provided the most detailed location). The locations were determined for 785 of the 841 communities. The remaining 57 communities were not located. Many of the communities that were not located were subdivisions or unmapped communities using local names.

The sum of the population served by ISTS in these communities was approximately 253,000. The total for unsewered communities under-represents the amount of ISTS systems in the state since it includes only systems within a community. Although summarized in Table 1, these data were not directly used in the comparison of methods.

MPCA ISTS Local Units of Government (LUG) Spreadsheet

This spreadsheet consists of a summary of ISTS by local units of governments with ISTS ordinances in 2002 (MPCA, 2002b). Included in the spreadsheet was the LUG name and type (e.g. city, township or county). An estimate of the number of full time and seasonal residences served by ISTS was included in the spreadsheet. There was also an estimate of the number of failing systems and an estimate for the number of systems which are considered an ITPHS. The population served was estimated by multiplying the number of full time residences by the population per household values (for the 2000 census) for the LUG's respective county.

The LUGs in this spreadsheet were located geographically as polygons using MnDOT's base map GIS layers for municipalities, townships, and counties. To prevent overlap between counties and the smaller governmental units, ArcInfo GIS was used to clean the boundaries between the overlapping

jurisdictional boundaries. For example, if a municipality had its own ISTS ordinance, the city boundary was excluded from the area of the County (which would also have an ordinance) in which it is located.

The resulting polygons were overlaid with the ten major basins to estimate the ISTS totals for each major basin. In cases where a jurisdiction was in two or more major basins, the ISTS population served for each basin was weighted by area. The sum of all the population served for the State of Minnesota was approximately 1,073,000 based on the LUG spreadsheet.

1990 Census of the United States

The 1990 Census (United States Census Bureau, 1990) included questions regarding sewage disposal for both vacant and occupied housing units. Below is a description of the data provided by the Census Bureau:

SEWAGE DISPOSAL

The data on sewage disposal were obtained from questionnaire item H16, which was asked at both occupied and vacant housing units. This item was asked on a sample basis. Housing units are either connected to a public sewer, to a septic tank or cesspool, or they dispose of sewage by other means. A public sewer may be operated by a government body or by a private organization. A housing unit is considered to be connected to a septic tank or cesspool when the unit is provided with an underground pit or tank for sewage disposal. The category, "Other means" includes housing units which dispose of sewage in some other way.

Comparability--Data on sewage disposal have been collected since 1940. In 1970 and 1980, data were shown only for year-round housing units. In 1990, data are shown for all housing units.

Note that sewage disposal data were not collected in the 2000 census (United States Census Bureau, 2000). The “septic tank or cesspool” and “other units” were combined as an estimate for ISTS in this study.

In the 1990 census, the sewage disposal data were not split between year-round and vacant/seasonal housing. For this study, it was assumed that the percentage of all housing units with ISTS were equal to the percentage of year-round housing units with ISTS. Therefore, the total ISTS in each census-blockgroup was estimated by multiplying the ratio of year-round housing to all housing units by the total number of households with ISTS in that census-blockgroup. The population served was calculated by multiplying the number of households with ISTS by the population per household for the census blockgroup.

The estimated population served by ISTS in Minnesota using the 1990 census data is 1,087,000.

Estimation of Population Served by ISTS by Difference Between 2000 Census and WWTP Population Served (Difference Method)

The sum of the population served by public/private wastewater treatment systems and ISTS can be assumed to be the population of the State of Minnesota during the 2000 census. The estimate of population served using ISTS by basin can be estimated by calculating the difference between the total population of each basin and the number of persons served by wastewater treatment plants in the basin.

The population served for each of the POTWs and privately owned wastewater treatment facilities were estimated. The population served for each facility was not readily available for all of the permitted facilities. Therefore, the following approach was taken and the following assumptions made (as per the Point Sources Technical Memorandum):

1. MPCA Delta Database. When available, the population served by a treatment facility as listed in the Delta database was used.
2. MNPRO Database. If population data was not available from the Delta database, the population of the community corresponding to the permit was assumed to equal the population served by the WWTP. This information was obtained from the MNPRO data base.
3. ISTS unsewered communities and LUG spreadsheets. These communities and the population served by ISTS systems were compared to the communities having an NPDES permit as listed in the Delta database. If a community had both a NPDES permit to discharge to

surface water and was listed as being served by an ISTS, the difference of the City's population and the ISTS population was used as the population served by the treatment facility. If no information could be located, the permit holder was called to determine the population served by each system.

4. MNPRO Database. The complete listing of communities within the state of Minnesota as contained in the MNPRO database was compared to both the NPDES list and the unsewered communities list to verify that all communities within the state were accounted for. Any communities with a population greater than 1,000, that were unaccounted for, were contacted and the final disposition of their wastewater was determined. In many cases these communities transferred their wastewater to another community's treatment facilities.
5. Communities with a population of less than 1,000 that did not have either an NPDES permit, or were listed as an ISTS or unsewered community, were assumed to be served by an ISTS system.
6. Finally, the population served by unsewered and ISTS systems was tallied on a major basin basis. These results are presented in Table 1.

The state-wide estimate for population served by ISTS based on the difference between the 2000 census and the POTW totals is approximately 1,094,000. The basin total ISTS values in Table 1 were corrected for the number of people whose domestic wastewater is treated in a wastewater treatment plant outside of the basin where they live. This correction was done for the four basins that include Twin City Metro Area. To determine the areas where there are basin transfers, 1997 Metropolitan Council sewersheds, showing the areas draining to specific wastewater treatment plants in the Metropolitan Area, were overlaid with the major basins. The result of this analysis was the area in each of the basins which discharge to a WWTP in a different basin. These data were then overlaid on the 2000 Census blockgroup data to determine the populations of the areas. The net results of this analysis are shown in Table 1.

The breakdown of population served by major basin presented in Table 1 was relatively consistent between the three methods summarized. The LUG spreadsheet and the POTW by difference methods showed the same overall percentage (22 percent) of the total population of the state is served by ISTS. The 1990 Census total had approximately the same state-wide population served value, but its percentage usage was higher since the population of the state was lower in 1990 compared to 2000.

In general, the three methods indicate that the total number of people served by ISTS in Minnesota is approximately 1,080,000, 22 percent of the total population in 2000.

The comparison shows a good match between the three methods for the Upper Mississippi River, Cedar River, St. Croix River, Red River of the North and Minnesota River basins. The Lake Superior and Rainy River basins have the largest discrepancy between the three methods, but the difference method value is near the average of the other two methods for both basins.

The smaller basins in southwest Minnesota (Missouri and Des Moines rivers) had the largest percentage differences, although their numerical differences were small since the populations of these basins are low. The reason the differences are so great in these two basins, on a percentage basis, is not clear.

The results in Table 1 show that using the difference method provides a good estimate for the number and distribution of ISTS users across the state. By using the difference method, the entire population of the state is accounted for in the phosphorus calculations for domestic wastewater generation.

Basin Characteristics

Population served by ISTS or unsewered communities, compliance of treatment systems with performance standards, groundwater conditions, and characteristics of soil absorption field and proximity to surface waters are important factors in determining phosphorus export. As previously discussed, the major basin for each of the communities in MPCA unsewered communities spreadsheet was determined by assigning an approximate geographic location based on the available city, township, lake/county, or township-range-section location data. The MPCA ISTS LUG spreadsheet provided estimates of the number of full time and seasonal residences served by ISTS, along with the number of failing systems and an estimate for the number of systems which are an ITPHS. The population data used for both ISTS and unsewered communities are included in Tables 1 and 2. Table 2 also shows the number of residential systems in each basin. The Upper Mississippi River basin accounts for almost one-quarter of the population served by ISTS and more than 60 percent of the unsewered areas population. The Minnesota, Lower Mississippi, Red and St. Croix River basins serve ISTS populations of between 110,000 and 160,000, while the Minnesota and St. Croix River basins have

unsewered area populations between 25,000 and 33,000. The remaining basins represent small fractions of the statewide populations served by ISTS and unsewered communities.

Table 2 shows the percentages of failing systems and systems which discharge partially treated sewage (or are considered an ITPHS), estimated for each of the basins and the state. These estimates show that the Des Moines River basin has the highest percentage (41%) of ISTS systems considered an ITPHS, followed by the Minnesota and Missouri River basins with 29 and 22 percent, respectively. The St. Croix, Lake Superior, Rainy and Upper Mississippi River basin estimates for percentages of ISTSs considered an ITPHS were all less than 8 percent. Table 2 shows that the Rainy River basin had the highest (43%), while the St. Croix basin had the lowest (11%), percentages of failing ISTS systems. All of the other basins had estimated percentages of failing ISTS systems between 24 and 35 percent. The high percentage for the Rainy River basin may be partially due to the presence of high water tables relative to the other basins.

Retardation of phosphorus contamination of surface waters from ISTSs is enhanced in fine-textured soils without continuous macropores that would allow rapid percolation. Increased distance of the system from surface waters is also an important factor in limiting phosphorus discharges because of greater and more prolonged contact with soil particle surfaces. The risk of phosphorus contamination, therefore, is greatest in karst regions and coarse-textured soils without significant iron, calcium, or aluminum concentrations located near surface waters (EPA, 2002). The presence of karst regions in portions of the Lower Mississippi River basin means that the 27 percent of failing ISTSs (from Table 2) might be lower than the actual percentage of systems adversely impacting groundwater. For this analysis, no attempt has been made to vary the estimates of phosphorus discharged to surface waters from conforming and non-conforming systems, based on the presence of karst regions, elevated water tables or various types of soils in each basin.

Table 2
Estimated Annual Phosphorus Loadings for ISTS/Unsewered Communities

| Major Basin | ISTS Population by Difference | Total Residential Systems | Percent Partially Treated | Percent Failing | Unsewered Area Population | Avg. Pop. per Household | Estimated P Load Produced (kg) | | | | Estimated P Load Discharged to Surface Waters (kg) | | | | | | | | |
|-------------------|-------------------------------|---------------------------|---------------------------|-----------------|---------------------------|-------------------------|--------------------------------|---------------------|---------------------|----------------|--|------------------------|---------------|----------------|----------------|------------------------|---------------|----------------|----------------|
| | | | | | | | Direct-to-Tile Systems | Direct-to-Tile Pop. | Remaining ISTS Pop. | Seasonal Pop. | Unsewered Area | Direct-to-Tile Systems | Seasonal ISTS | Remaining ISTS | Unsewered Area | Direct-to-Tile Systems | Seasonal ISTS | Remaining ISTS | Total |
| Cedar River | 17,654 | 4,500 | 15.7% | 34.6% | 299 | 3.92 | 514 | 2,016 | 15,339 | 0 | 264 | 1,784 | 0 | 13,568 | 114 | 767 | 0 | 2,939 | 3,880 |
| Deer Mainor River | 6,818 | 5,420 | 41.1% | 23.8% | 1,028 | 1.28 | 419 | 536 | 5,254 | 191 | 909 | 474 | 56 | 4,647 | 391 | 204 | 20 | 1,316 | 1,930 |
| Lake Superior | 33,419 | 16,000 | 5.5% | 35.0% | 342 | 4.80 | 0 | 0 | 39,077 | 16,363 | 303 | 0 | 4,825 | 34,565 | 130 | 0 | 1,415 | 6,507 | 8,051 |
| Lower Mississippi | 143,466 | 31,002 | 10.6% | 26.8% | 11,272 | 4.75 | 450 | 2,137 | 130,057 | 1,676 | 9,971 | 1,891 | 494 | 115,041 | 4,287 | 813 | 141 | 21,707 | 26,949 |
| Minnesota River | 158,257 | 67,100 | 29.4% | 32.8% | 25,872 | 2.55 | 7,399 | 18,847 | 113,538 | 10,437 | 22,885 | 16,671 | 3,077 | 100,430 | 9,841 | 7,168 | 1,056 | 26,377 | 44,442 |
| Missouri | 16,637 | 5,233 | 22.1% | 33.4% | 509 | 3.27 | 227 | 743 | 15,445 | 281 | 450 | 658 | 83 | 13,662 | 194 | 283 | 27 | 3,275 | 3,778 |
| Rainy River | 33,533 | 23,928 | 7.0% | 43.1% | 6,216 | 2.02 | 0 | 0 | 27,317 | 15,395 | 5,498 | 0 | 4,539 | 24,163 | 2,364 | 0 | 1,431 | 5,056 | 8,851 |
| Red River | 112,474 | 46,447 | 13.1% | 27.0% | 8,966 | 2.92 | 0 | 0 | 103,508 | 16,655 | 7,931 | 0 | 4,911 | 91,558 | 3,410 | 0 | 1,434 | 18,038 | 22,882 |
| St. Croix River | 110,520 | 45,249 | 2.3% | 11.4% | 32,612 | 2.76 | 0 | 0 | 77,908 | 10,857 | 28,847 | 0 | 3,201 | 68,913 | 12,404 | 0 | 741 | 8,987 | 22,132 |
| Upper Mississippi | 453,857 | 227,515 | 7.8% | 24.7% | 154,696 | 2.32 | 436 | 1,014 | 298,147 | 67,809 | 136,836 | 897 | 19,993 | 263,725 | 58,839 | 386 | 5,497 | 46,250 | 110,972 |
| TOTAL | 1,092,695 | 472,394 | 11.6% | 26.4% | 241,812 | 2.69 | 9,445 | 25,294 | 825,589 | 139,665 | 213,894 | 22,373 | 41,180 | 730,271 | 91,974 | 9,621 | 11,762 | 140,510 | 253,867 |

The Minnesota River basin had a significant number of households served by sewage treatment systems that involved direct discharge to a tile drain line (Tetra Tech, 2002). The majority of these systems, referred to as direct-to-tile ISTS, include a septic tank with no other treatment. Assuming that most of the direct-to-tile ISTS are located in rural areas with tile lines, Tetra Tech (2002) extracted data from the Minnesota River Assessment Project, or MRAP (MPCA, 1994), to develop a relationship between the number of direct-to-tile ISTS and cropland. The ISTS densities and cropland were then mapped by minor watersheds across the Minnesota River basin. The higher densities of direct-to-tile ISTS occurred in the southeastern watersheds, while the lower densities occurred in the northwestern watersheds (Tetra Tech, 2002). The geographic trend in density was assumed to be consistent with the MRAP designations for three nutrient source regions, and the average density of direct-to-tile ISTS per 10,000 acres of cropland was determined for each source region. The average densities determined for Source Regions 1, 2, and 3 were 0.78, 4.88, and 18.17 direct-to-tile ISTS per 10,000 acres of cropland, respectively (Tetra Tech, 2002). Source Regions 1, 2, and 3 progress from the northwest to the southeast in the Minnesota River basin.

For this analysis, the assumptions about direct-to-tile ISTS density per 10,000 acres of cropland for each source region were retained for the Minnesota River basin. Since no assessments of direct-to-tile ISTS had been published for any other basins in Minnesota, several of the minor watersheds in surrounding basins were assumed to have direct-to-tile ISTS densities comparable to Source Regions 1, 2, and 3, based on knowledge of the presence of drain tiles, cropland and their proximity to the MRAP study areas. Figure 2 shows how these minor watersheds, with their assumed Source Region designations, provide a transition in the direct-to-tile ISTS densities assumed to exist outside of the areas studied in MRAP (MPCA, 1994). The amount of cropland and area of each Source Region was determined and multiplied to determine the total number of direct-to-tile systems for each basin (shown in Table 2). The population served by direct-to-tile ISTS was estimated by multiplying the number of systems by the average household size for each basin (shown in Table 2).

As previously discussed, Table 2 presents the populations associated with unsewered communities and direct-to-tile ISTS in each basin. The per capita total phosphorus wastewater load of 0.8971 kg/yr was applied to the population served by direct-to-tile ISTS and unsewered communities for each basin. Both of these source categories were assumed to receive treatment from septic tanks before discharging to surface waters. Forty-three percent of the incoming wastewater load from each source category was assumed to pass through the septic tank, which is consistent with the assumptions made for the Minnesota River Basin Model (Tetra Tech, 2002).

As previously discussed, the number of seasonal residences had been estimated in the MPCA ISTS LUG spreadsheet (MPCA, 2002). Since no data was available for the population served by seasonal ISTS, a household size of 2.1 was assumed and applied to the number of seasonal residences in each basin. This assumption is consistent with the household size used for the Minnesota River Basin Model (Tetra Tech, 2002). No literature was found, so it was assumed that each of the seasonal residences were occupied for four months each year. It was further assumed that, since seasonal residences are typically located in close proximity to surface waters, nonconforming ISTS (both failing and ITPHS) would contribute all of the 43 percent of phosphorus passing through a septic tank to surface waters. Conforming seasonal ISTS were assumed to remove 80 percent of the total phosphorus loading, due to treatment from the septic tank and soil absorption field, before discharging to surface waters in each basin.

As previously discussed, the total number of residential residences had been estimated in the MPCA ISTS LUG spreadsheet (MPCA, 2002) and the population served by ISTS had been estimated by difference (shown in Table 1). Since most of the permanent residences are not typically located as close in proximity to surface waters as seasonal residences, it was assumed that both fully conforming and failing ISTS would provide higher phosphorus attenuation for permanent residences than what was assumed for seasonal residences. Conforming ISTS were assumed to remove 90 percent of the overall total phosphorus loading, while failing ISTS were assumed to remove 70 percent of the overall total phosphorus loading, before discharging to surface waters in each basin. The nonconforming ISTS, considered an ITPHS, were assumed to be contributing all of the 43 percent of phosphorus passing through a septic tank to surface waters. The phosphorus removal and soil phosphorus attenuation percentages assumed for conforming and nonconforming ISTS in this

analysis are within the range of literature values (Viraraghavan and Warnock, 1975; Reckhow and Simpson, 1980; Kellog et al., 1995; EPA, 2002; ENSR, 2003).

Results of Phosphorus Loading Computations and Assessments

Table 2 presents the results of the phosphorus loading computations done for the assessment of ISTS and unsewered communities. The last five columns of Table 2 show the estimated total phosphorus loadings to surface waters from unsewered communities, direct-to-tile ISTS, all seasonal ISTS, the remaining ISTS, and the total load in each basin (and the state) from all four source categories. On a statewide basis, Table 2 shows that more than half of the phosphorus load from unsewered communities/ISTS is coming from permanent ISTS, while approximately 35 percent of the total load originates from unsewered communities. Unsewered communities represent a large percentage of the total load to the St. Croix and Upper Mississippi River basins (56 and 53 percent, respectively). Unsewered communities represent less than 27 percent of the total phosphorus load for the remaining basins. Direct-to-tile ISTS represents 20, 16 and 11 percent of the total phosphorus load in the Cedar Minnesota, and Des Moines River basins, respectively; but less than 8 percent for the remaining basins. The estimated seasonal ISTS contributions are 16 and 18 percent of the total phosphorus loads in the Rainy River and Lake Superior basins, respectively, and less than 7 percent for the remaining basins. The remaining ISTS contributions (from both conforming and nonconforming systems) accounts for more than 40 percent of the total phosphorus load from ISTS/unsewered communities in all of the basins. The highest total phosphorus contribution from the remaining ISTS category is 87 percent in the Missouri River basin.

Phosphorus Loading Variability and Uncertainty

The primary sources (and estimated magnitudes) of variability and uncertainty in the total phosphorus loading computations done for this assessment, in descending order, include:

- Percentage of phosphorus attenuation in soil absorption field for permanent and seasonal residences—(these percentages are likely to vary by 50 percent or more, depending on the proximity to surface water, soils and water table characteristics, etc.; if the all of the conforming systems from the remaining ISTS category removed 100% of the P load produced,

the 140,510 kg total P load discharged to surface waters [in Table 2] would be reduced by approximately 30%)

- Portion of unsewered communities receiving various levels of treatment, more or less than septic tank removals (as assumed)—(these percentages are likely to vary by 50 percent or more, as some of the unsewered communities may be receiving good treatment with soil absorption, while others may not even receive treatment from septic tanks)
- Population of unsewered communities—(population figures may vary significantly within each basin depending on each county's ability to determine, report or verify and update the presence and population of unsewered communities)
- Population served and portion of direct-to-tile ISTS receiving various levels of treatment, more or less than septic tank removals (as assumed)—(these values are likely to vary by 100 percent or more, as the number of systems and population served are extrapolated from a small subset of areas studied in the MRAP which may or may not have already been counted with the ITPHS percentages, and some of the direct-to-tile ISTS may not even receive treatment from septic tanks)
- Population served and per capita P loadings for permanent versus seasonal residences—(the current P loading estimates assume that all of the population served by seasonal residences [2.1 people per seasonal residence for 4 months each year] is in addition to all of the P loadings generated by the current permanent residents of Minnesota, which may overestimate the P load from permanent Minnesota residents that maintain seasonal residences, but helps to offset both the fact that seasonal residences may be under-represented in the databases and the fact that people from other states maintain seasonal residences; in addition, the per capita loadings for dishwashing detergents and dentifrices are based on actual nationwide consumption, while the per capita loadings for human waste and food soils are based on monitoring of permanent residences)

Table 2 shows that the average ISTS household size determined for each basin can vary significantly from the statewide average of 2.7. The average ISTS household size was determined by dividing the total population served by ISTS by the total number of residential systems. The low household size value of 1.3 for the Des Moines River basin, may be the result of an underestimate of the population served by ISTS and unsewered communities or an overestimate of the number of residential systems. The high household sizes of approximately 4.8 for the Lower Mississippi and Lake Superior basins

indicate that there may be an overestimate of the population served by ISTS and unsewered communities or an underestimate of the number of residential systems. There was much smaller variability from the statewide average for household size in the remaining basins. Over- or underestimates of population are much more important in the calculations of the total phosphorus loadings for each basin than the estimates of the number of residential systems because the population figures determine the amount of wastewater (and phosphorus) that is generated and available for export in each basin.

Recommendations for Future Refinements

The following refinements are recommended to reduce the error terms or uncertainty of the phosphorus loading estimates:

- The counties should work with the MPCA to develop, populate and maintain a geographic database, similar to MPCA's feedlot database that shows where each of the failing systems, straight pipe discharges and other types of ITPHS are located
- County personnel should be trained to assess the proper functioning of each type of system and be provided with an incentive to track all inspected and nonconforming systems, such that uniform assessments can be made throughout the state
- The estimates for population served by conforming and nonconforming systems, as well as unsewered communities and direct-to-tile ISTS, should be refined, updated and linked to a geographic database
- Additional analyses should be done to study the treatment effectiveness of conforming and nonconforming treatment systems, throughout the state, to evaluate the variability of the estimated phosphorus loadings to surface waters under various settings

Recommendations for Lowering Phosphorus Export

Many of the counties are delegated to implement the Minnesota Rules (Chapter 7080) for ISTS, which require conformance with state standards for new construction and disclosure of the state of the ISTS when a property transfers ownership. Several counties require ISTS upgrades at property transfer.

To: Marvin Hora, Doug Hall and Mark Tomasek, Minnesota Pollution Control Agency
From: Greg Wilson and Tim Anderson
Subject: Final — Detailed Assessment of Phosphorus Sources to Minnesota Watersheds — Individual Sewage Treatment Systems/Unsewered Communities
Date: January 16, 2004
Page: 19

Lack of knowledge is thought to be a major impediment to making more rapid progress toward goals and objectives for ISTS and unsewered communities (MPCA, 2003b). This includes a lack of awareness of the management and operational requirements of ISTS, and the environmental consequences of widespread system failure. The complexity of addressing unsewered community issues tends to discourage county activity in this area. The availability of financial assistance, particularly low-interest loans, is thought to be an essential catalyst to accelerating fixes of failing ISTS. This and other forms of financial assistance are needed to accelerate progress with unsewered communities (MPCA, 2003b).

Owners of ISTS that are failing and pose an “Imminent Public Health Threat,” through direct discharge to tile lines or surface ditches or system failure caused by lack of proper management should be targeted through mail surveys (and one-to-one visits in targeted watersheds) to help residents determine whether their ISTS are adequately functioning, inadequately installed, or are failing to function properly because of poor management (MPCA, 2003b). Programs proposed to follow up on specific problems include ISTS management workshops for failing systems and technical and financial assistance to owners needing new systems.

Residents of unsewered communities would be targeted to help them understand the need for wastewater treatment and assist them through each phase of the community decision-making process, while building the capacity of local and regional government staff to provide such assistance to other communities in the future (MPCA, 2003b).

County ISTS inspectors, Planning and Zoning Administrators, and County Water Planners should be targeted with MPCA audits of county ISTS programs to determine adequacy of performance in a number of key areas, including spot checks on recent ISTS installations, level of effort on ISTS inspections and follow-through on noncompliant systems, and dealing with contractors (MPCA, 2003b).

Since septic system failure is a widespread problem, a basinwide approach to reducing fecal coliform from this source should be pursued (MPCA, 2003b). Failing systems with potential for high delivery of pollutants to public waters, such as straight pipe discharges and other types of ITPHS should be given priority attention. Careful targeting is needed to ensure that resources devoted to providing wastewater treatment yield environmental results in the form of reduced concentrations of total phosphorus. The counties should work with the MPCA to develop, populate and maintain a database, similar to MPCA’s

To: Marvin Hora, Doug Hall and Mark Tomasek, Minnesota Pollution Control Agency
From: Greg Wilson and Tim Anderson
Subject: Final — Detailed Assessment of Phosphorus Sources to Minnesota Watersheds — Individual Sewage Treatment Systems/Unsewered Communities
Date: January 16, 2004
Page: 20

feedlot database that shows where each of the failing systems, straight pipe discharges and other types of ITPHS are located. County personnel should be trained about the assessment of each type of system and provided with an incentive to track all inspected and nonconforming systems, such that uniform assessments can be made throughout the state.

Literature Cited

- Barr Engineering Company (Barr). 2003. *Detailed Assessment of Phosphorus Sources to Minnesota Watersheds—Point Sources Technical Memorandum*. Prepared for Minnesota Pollution Control Agency.
- ENSR. 2003. *Inputs of phosphorus to aquatic systems from machine dishwashing detergents: an analysis of measured and potential loading*. Prepared for the Soap and Detergent Association.
- Kellogg, D.Q., L. Joubert, and A. Gold. 1995. *MANAGE: a Method for Assessment, Nutrient-loading, and Geographic Evaluation of nonpoint pollution. Draft Nutrient Loading Component*. University of Rhode Island, Kingston, RI.
- Metropolitan Council, 1997. Boundaries of the sewersheds for the Twin Cities metropolitan area. Downloaded from <http://www.datafinder.org/>
- Minnesota Department of Transportation, Basemap. Civil Townships, Municipalities. Downloaded from <http://www.dot.state.mn.us/tda/basemap/index.html>
- MPCA. 1994. *Minnesota River Assessment Project (MRAP) Report*. Report to the Legislative Commission on Minnesota Resources.
- MPCA. 2002a. *Regional Total Maximum Daily Load Evaluation of Fecal Coliform Bacteria Impairments in the Lower Mississippi River Basin in Minnesota*.
- MPCA. 2002b. Spreadsheet showing 2002 reported values for ISTS for all LUGs which have an ISTS ordinance.
- MPCA. 2003a. Spreadsheet listing unsewered communities in Minnesota.
- MPCA. 2003b. *Implementation Plan. Regional Total Maximum Daily Load Study of Fecal Coliform Bacteria Impairments in the Lower Mississippi River Basin of Southeast Minnesota*.
- Reckhow, K.H. and J.T. Simpson. 1980. *A procedure using modeling and error analysis for the prediction of lake phosphorus concentration from land use information*. Can.J.Fish.Aq.Sci. 37(9): 1439-1448.
- Tetra Tech, Inc. 2002. *Minnesota River Basin Model, Model Calibration and Validation Report*. Prepared for Minnesota Pollution Control Agency.

To: Marvin Hora, Doug Hall and Mark Tomasek, Minnesota Pollution Control Agency
From: Greg Wilson and Tim Anderson
Subject: Final — Detailed Assessment of Phosphorus Sources to Minnesota Watersheds — Individual Sewage Treatment Systems/Unsewered Communities
Date: January 16, 2004
Page: 21

Unites States Census Bureau. 1990. *Census of Population and Housing*.

Unites States Census Bureau. 2000. *Census of Population and Housing*.

United States Environmental Protection Agency (EPA). 2002. *Oniste Wastewater Treatment Systems Manual*. Office of Water, Office of Research and Development. EPA/625/R-00/008.

Viraraghavan, T. and R.G. Warnock. 1975. *Treatment efficiency of a septic tile system*. In Proc. National Home Sewage Disposal Symposium, ASAE., St. Joseph, MI. pp. 48-57.